



[Zoom in Picture](#)

■ Features

- 2x RS232/ 2xRS422/485 or 4x RS422/485 ports
- up to 16 ports per host
- PCI bus
- RS485 Automatic Data Direction Control (ADDC)
- On-board termination resistors for impedance matching
- Speed up to 921.6K bps
- Optical isolation, max. 2kV<

CP-114 IS PCI

Quick Link: | [Features](#) | [Overview](#) | [Applications](#) | [Specification](#) | [Hardware](#) | [Interface](#) | [Performance](#) | [Configuration](#) | [Power and Environment](#) | [Ordering Information](#) |

■ Overview

The CP-114 IS PCI is designed for RS232 and RS422/485 industrial communication. It supports 4 switchselectable, independent RS232 and RS422/485 ports. Each RS422/485 port can control up to 32 devices in a multidrop environment.

Applications can easi

■ Applications

- Industrial control
- Embedded industrial machine
- SCADA
- Multiport data acquisition
- Factory automation
- Remote serial device control

■ Specification

■ Hardware

I/O controller	4x 16C550C or compatible, each with 16 bytes Tx/Rx FIFO
Connector type	Male DB9

[>Back to top](#)

■ Interface

Bus interface	PCI version 2.1 (32bit)
Serial interface	RS232, RS422 / 485
No. of ports	4
Signals	RS232 TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND RS422 TxD+/-, RxD+/-, RTS+/-, CTS+/-, GND RS485 Data+/-, GND
RS485 data control	Auto (Automatic Data Direction Control) or by RTS
Built-in termination resistor	RS485 120 Ohm, jumper enable / disable

[>Back to top](#)

■ Performance

Speed	50 - 921.6Kbps
Max. no. of ports	16 (4 boards)

[>Back to top](#)

■ Configuration

Parity	None, even, odd, space, mark
Data bits	5, 6, 7, 8
Stop bits	1, 1.5, 2
IRQ	Assigned by BIOS
I/O address	Assigned by BIOS

[>Back to top](#)

■ Power and Environment

Power requirement	720mA max.(+5V), 43mA(+12V), 31mA(-12V)
Operation temp.	0°C - 55°C
Dimension	135mm x 110mm
Isolation Protection	2KV
Surge Protection	25kV ESD

Operating Systems supported

XP, Windows 2000, Windows NT, Windows 95/98/ME, DOS

[>Back to top](#)

■ Ordering Information

Art.No 783


Product Name CP-114 IS PCI

Packing list

CP-114 IS PCI card
cable DSUB 37 to 4 x DSUB 9 male
CD, English documentation
PComm Lite serial comm developing tool

[>Back to top](#)

■ Full size product image

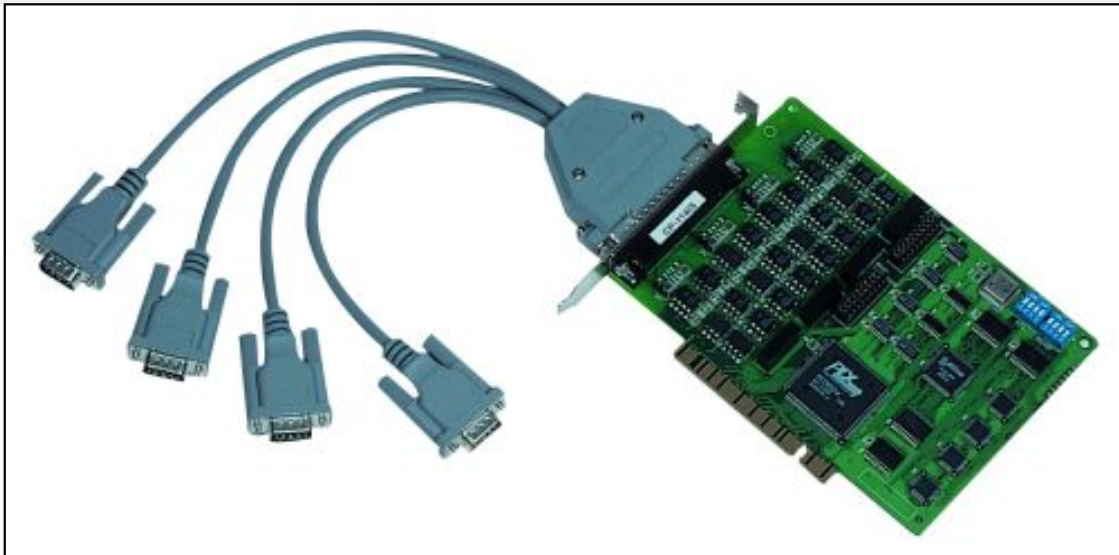

[>Back to top](#)

Remote Management

Products:
eWON Netbiter



Remote Access and Remote Data

Products:
eWON Flexy & Cosy



Wireless access

Products: Anybus Wireless Bridge
Anybus Wireless Bolt, IXXAT CANblue II



CAN infrastructure

Products:
IXXAT CAN products



PC Interfaces

Products:
IXXAT PC cards
IXXAT INpact



Functional safety

Products:
A a



Embedded multi-network connectivity

Products: Anybus CompactCom



Multi-network connectivity

Products: Anybus at ay
Anybus Communicator



Connectivity solved!



Todo en Redes Industriales, Buses de Campo, Control de Proceso.

ER-Soft, S.A.

**C/ Comunidad de la Rioja, 3
28231 Las Rozas (Madrid)**

www.er-soft.com, info@er-soft.com, Tel: 916 408 408