

## Industrial Touch Display

## IVTK-M-171T-G

17" TFT LCD, Capacitive/Resistive Touch Screen, HDMI &amp; VGA , OSD Function Keys



## Key Features

- Aluminum die-casting chassis, natural smooth design
- 17" LED TFT LCD, LED backlight
- 5 wire heat-resistant resistive touch screen
- Optional projected capacitive screen, Support multi touch
- HDMI and VGA video input
- Audio input, 2\*3W speakers
- DC 9~36V wide power input
- Flat bezel, IP65 front panel



HDMI Audio in RS232 Touch  
DC 9-36V VGA USB Touch

IVTK-M-171T-G is a new industrial touch display. ALAD-171T supports 19

inches 1280\*1024 TFT LCD, with 5-wire resistive touch screen, optional projected capacitive touch. There are HDMI&VGA video input, Audio input, 2\*3W speakers and DC 9~36V wide power input. It is an industrial-standard multimedia display with a variety of installations that is fit for different applications.

## SPEC


Video	HDMI	Resolution	1280*1024
		Horizontal Frequency	30-90KHz
	VGA	Vertical Frequency	56~75Hz
		General	
Audio	Frequency Response	±3dB	
	R/L Channel Separation	70dB	
	Degree of Distortion(THD)	1.5~2%	
	Signal-Noise Ratio(S/N)	80dB	
Power	Input Voltage	DC 9~36V	
	Power Consumption	12V@1.6(No consumption output)	
	Power Requirement	> 12V@2.5A	
	Standby Current	Low power consumption , standby consumption<1W	
Audio Amplifier	2*3W(4Ω)(Optional)		
OSD Language	Chinese,English,German,French,Russian,Italian,Spanish,Arabic,and so on		
OSD Function key	AUTO/Power/Menu/Source/UP(LEFT)/DOWN(RIGHT)		
LED Light	Green for display, red for standby		
Mechanical & Environmental	Construction	Aluminum die-casting front bezel and chassis, fin-shaped radiator shell	
	Operating Temperature	-0~60°C with airflow	
	Storage Temperature	-40~80°C	
	Storage Humidity	10~95%@40°Cnon-condensing	
	Shock	10g peak acceleration(duration 1ms)	
	Vibration	1g 5~500Hz	
	Mounting	Panel mounting, VESA 100*100	
	Dimension	(W*H*D):415.5*360.5*59mm; mounting cut out(W*H) : 407*352mm	
	Net Weight	TBD	
	EMC	CE, FCC Class A	

\* All specifications and photos are subject to change without notice.

LCD	Type	17" TFT LED	
	Resolution	1280*1024	
	Color	16.19M	
	Pixel Pitch(mm)	0.264*0.264(mm)	
	Brightness(cd/m <sup>2</sup> )	600	
	Viewing Angle	80°(left), 80°(right), 70°(up), 80°(down)	
	Operating Temperature	-0~60°C	
	Backlight Lifetime	70000 hours	
Touch	Type	5 wire resistive screen	Projected capacitive screen
	Resolution	gapless	gapless
	Light Transmittance	83%	90%
	Interface	USB	USB
	Consumption	+5V@200mA	+5V @300mA
	OS	Windows/Linux	Windows/Linux
	Click Lifetime	35 million times	3 billion times

## Dimension

Unit: mm

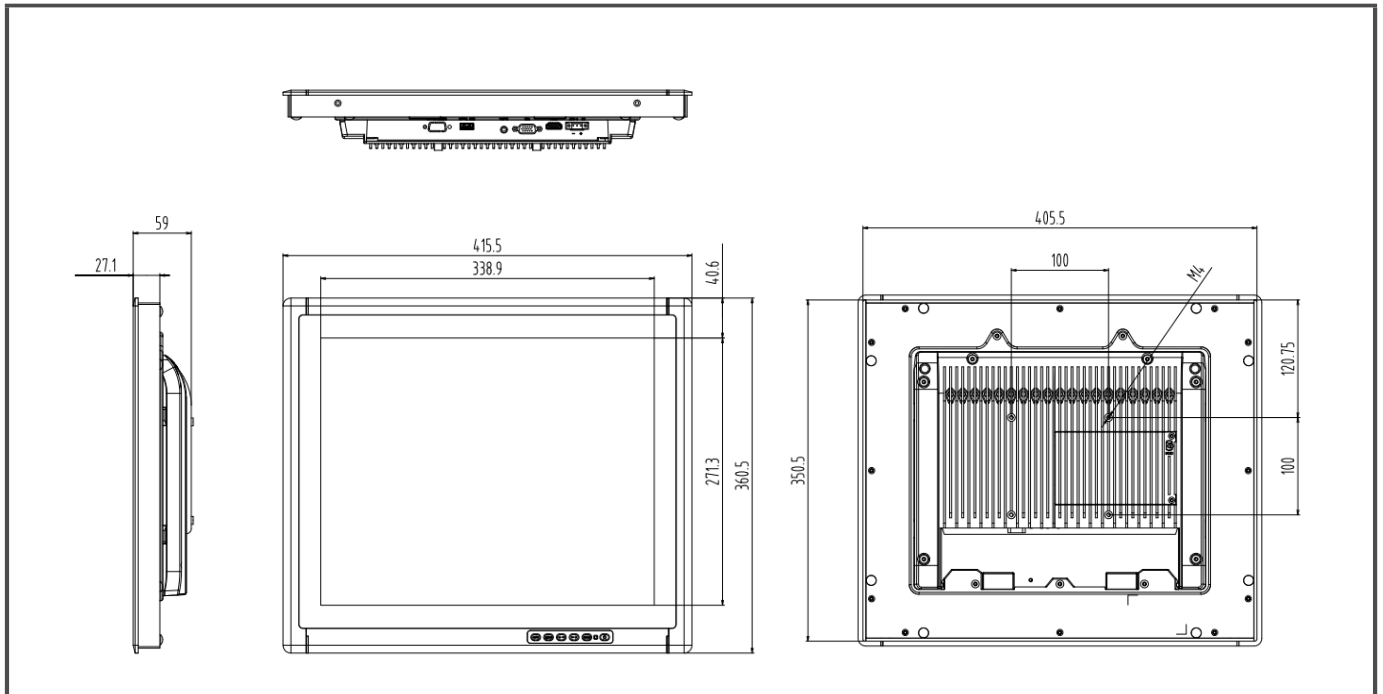

## Ordering Info

Model NO.	Introductions
IVTK-M-171T-G/ S001	Industrial touch display, 17" TFT LCD, 5 wire resistive screen, 1*HDMI, 1*VGA, 1*Audio in, 2*speaker, DC 9~36V
IVTK-M-171T(P)-G/ S001	Industrial touch display, 17" TFT LCD, projected capacitive screen, 1*HDMI, 1*VGA, 1*Audio in, 2*speaker, DC 9~36V
IVTK-PA-60DC12	AC/DC power adapter, DC12V/5A 60W